



Rack Mount High Density Cassette Base-8

Tech Specs

SO-HD-3xMPO/SM-24xLC

Rack Mount High Density Cassette Base-8 3x MPO-12 In, 12x LC Out, Single-mode Duplex OS2

1. PRODUCT INTRODUCTION

This is an MPO fiber optic cassette high density interchangeable patch panel with 3x MPO-12 in and 12x LC duplex out, single-mode OS2. It is a highly flexible fiber management unit for use in our High Density Chassis for a maximum of 567-fibers in 4U. We providing you with an integrated, cost effective solution for all of your network upgrade needs.



2. PRODUCT SPECIFICATION & FEATURES

- 3x Base-8 in One Cassette Tray
- 12x Duplex LC/UPC adapters
- 3x MPO/APC Male adapter
- Single-mode OS2
- All adapters and pigtails in included in cassette



3. GENERAL SPECIFICATIONS

Items	Specification	Unit
Dimensions	277.25 (L) x 198 (W) x 12.5 (H)	mm
LC Connector	LC Adapter Key Up.	
MPO Connector	MPO Adapter Key Down. Blue, Aqua, Orange, Pink, Green, Purple, Brown, and Yellow.	
Dust Caps	Blue, Aqua, Orange, Pink, Green, Purple, Brown, and Yellow.	
Insertion Loss	MPO≤0.7. LC≤0.2.	dB
Return Loss	MPO≥60. LC≥55.	dB

4. MECHANICAL DIMENSIONS

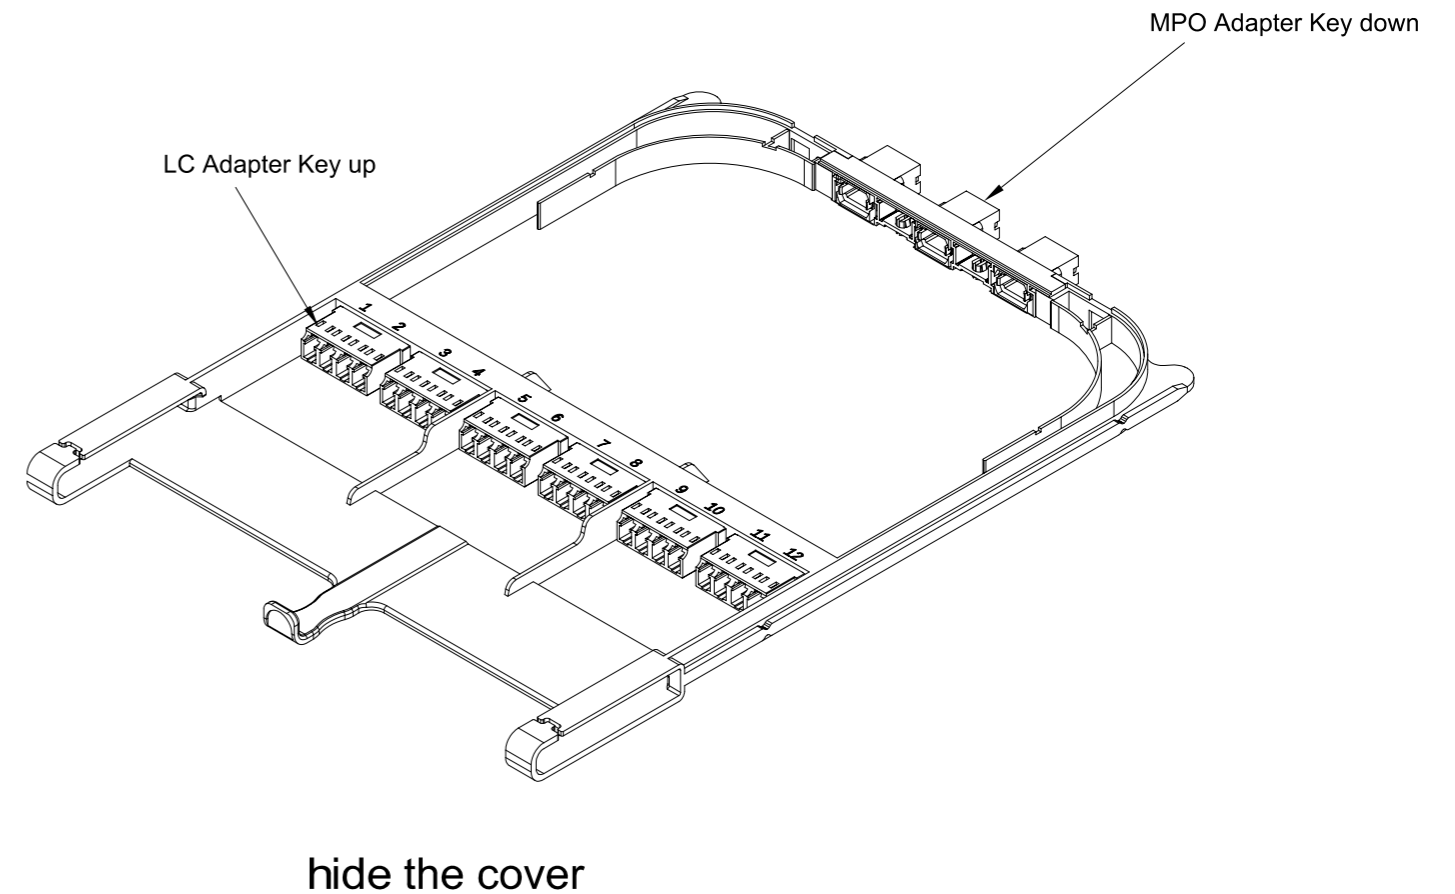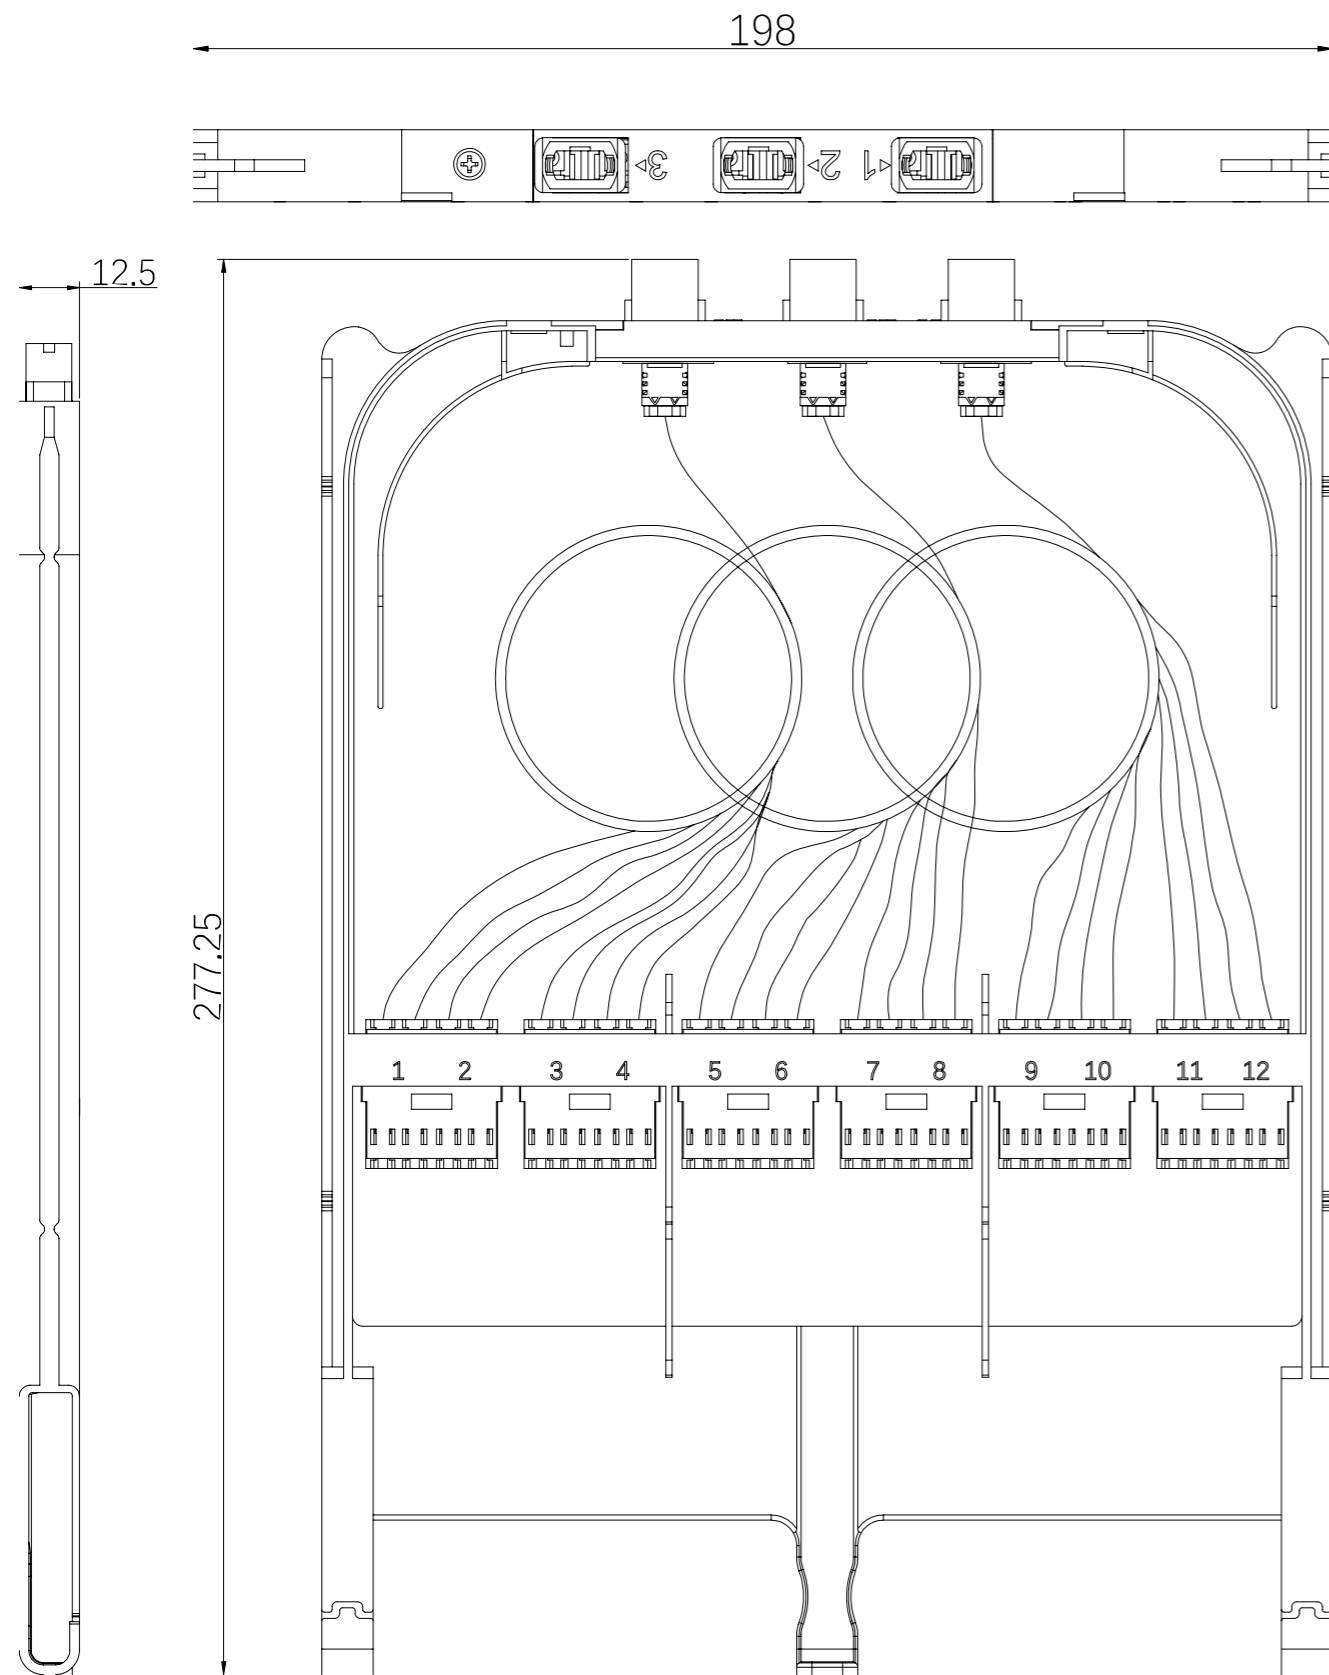

MPO 1				MPO 2				MPO 3							
1	2	3	4	5	6	7	8	9	10	11	12				
Blue	Aqua	Orange	Pink	Green	Purple	Brown	Yellow	Blue	Aqua	Orange	Pink	Green	Purple	Brown	Yellow

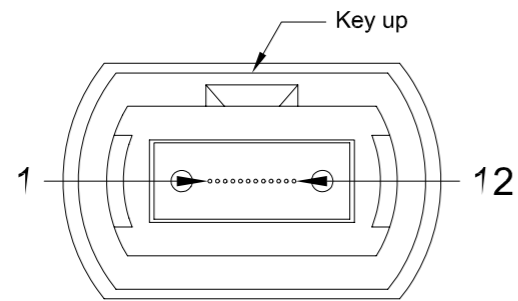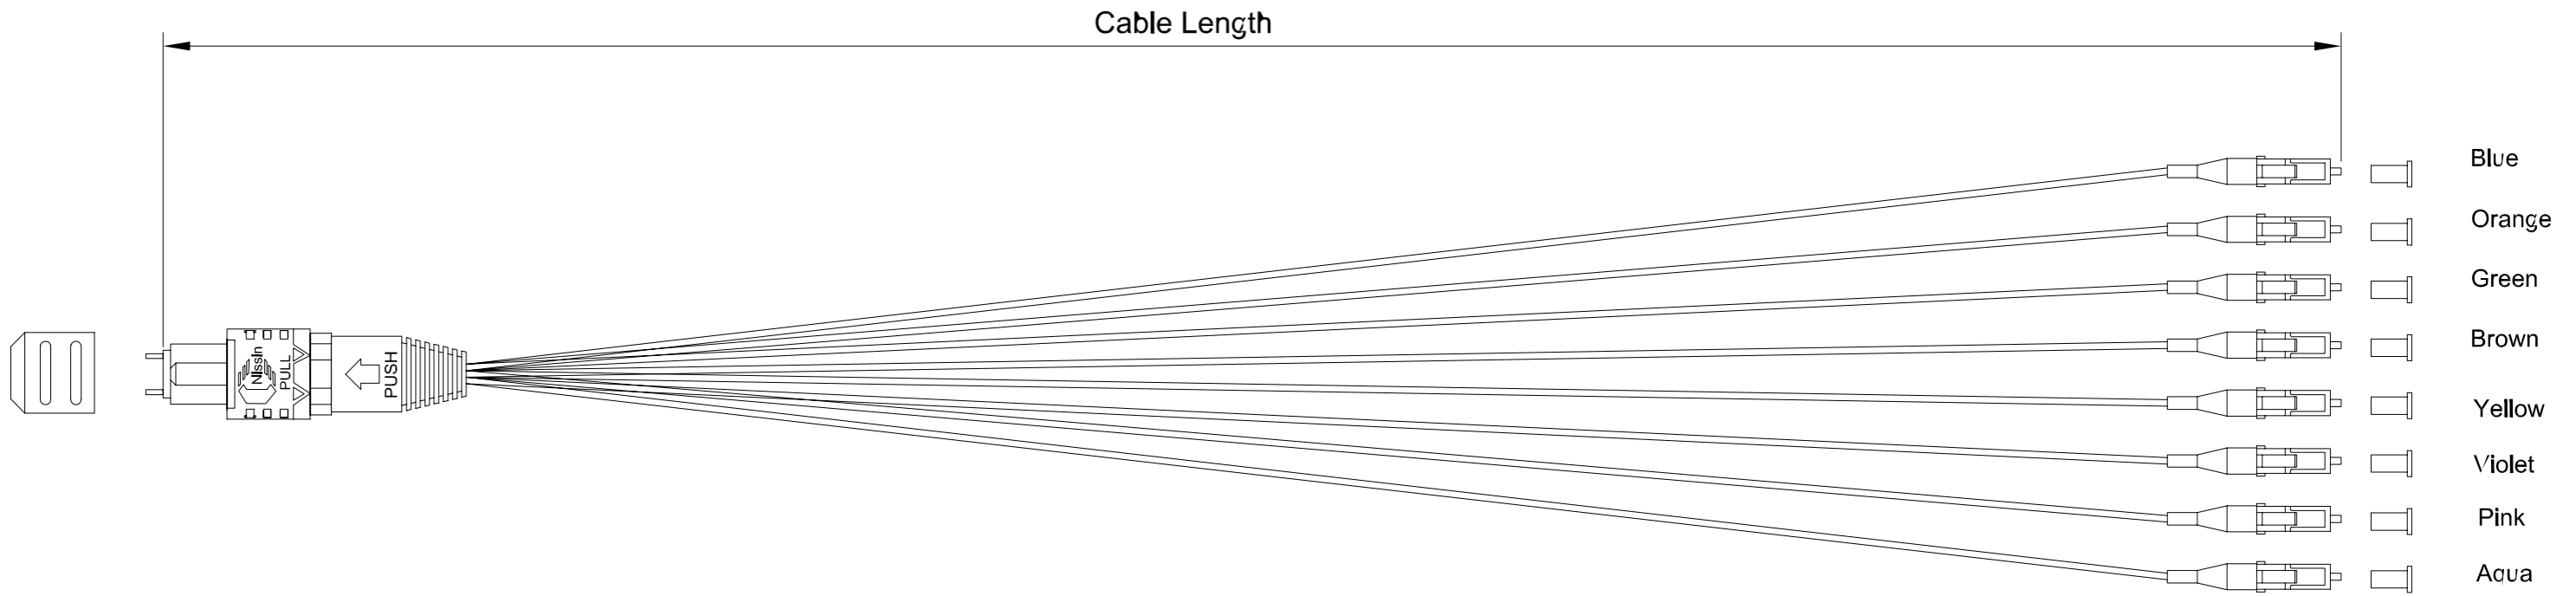

Blue ¹	Orange ²	Green ³	Brown ⁴	Grey ⁵	White ⁶	Red ⁷	Black ⁸	Yellow ⁹	Violet ¹⁰	Pink ¹¹	Aqua ¹²
-------------------	---------------------	--------------------	--------------------	-------------------	--------------------	------------------	--------------------	---------------------	----------------------	--------------------	--------------------



Get in touch



EU Customer Support
+31 (0) 88 342 3776
info@solid-optics.com



US Customer Support
+1 855 678 4271
infous@solid-optics.com